

EN 6L方块彩屏喂食器 英文说明书

材质:105G铜版纸

注意:封面封底内页空白


尺寸:148*170mm

方式:骑马订

日期:2024.9.25

字体:思源黑体、Baskerville Old Face

修改:星星




封面



封底



Automatic Pet Feeder **USER MANUAL**

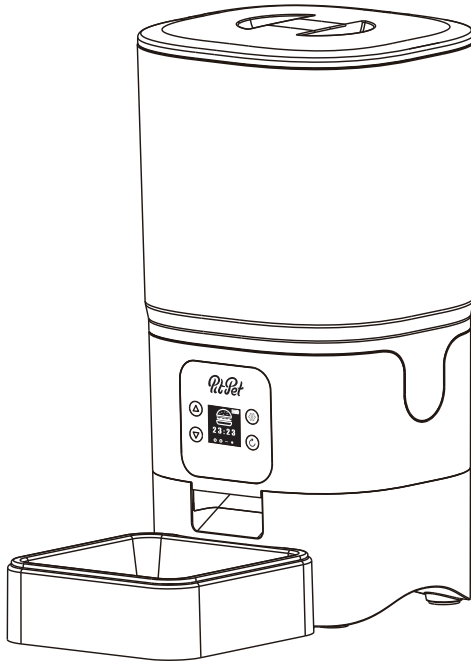

**Please read the manual carefully before using
retain for future reference**

If you still need any additional information
on how to set up your Automatic Feeder,
or you have any issue with this product

SCAN NOW



REFERENCE FOR MEAL & PORTION SETTINGS

Note: Below is the recommended amount of food your pet needs by each day

One portion servicing size is approx.15g

- DOG -


Dog Weight	Normal Activity	Increased Activity	Dog Weight	Normal Activity	Increased Activity	Vigorous Activity
2kg	39g	45g	22kg	250g	290g	329g
4kg	66g	76g	24kg	267g	309g	351g
6kg	89g	104g	26kg	274g	318g	361g
8kg	111g	128g	28kg	290g	336g	381g
10kg	131g	152g	30kg	305g	353g	402g
12kg	150g	174g	32kg	320g	371g	422g
14kg	178g	206g 235g	34kg	335g	388g	441g
16kg	197g	228g 259g	36kg	350g	405g	461g
18kg	197g	228g 259g	38kg	364g	422g	480g
20kg	233g	270g 307g	40kg	379g	439g	496g

- CAT -


Age (months)	1-2	2-4	4-6	6-8	8-12
Suggested feed	20-30g	30-50g	50-70g	70-80g	80-90g
Weight	2-3kg	3-5kg	5-7kg	pregnancy	Lactation
Suggested feed	25-35g	35-55g	55-85g	70-110g	120-190g

your pet fails to eat his entire meal, reduce the next meal portion.

PRODUCT OVERVIEW

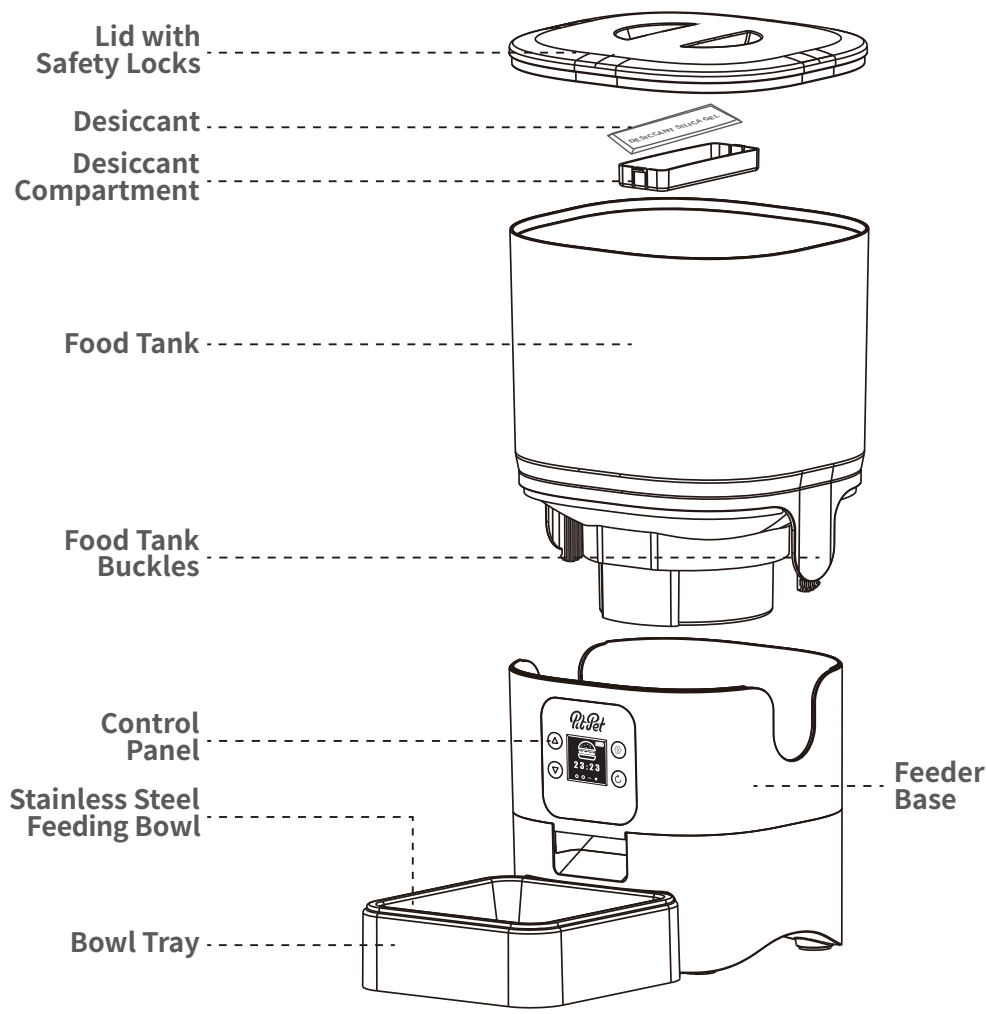

WHAT'S IN THE BOX

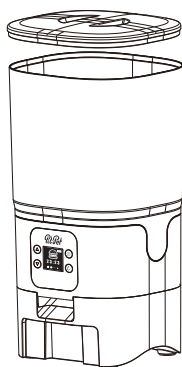

**Pet
Feeder**

**Stainless Steel
Feeding Bowl**



**Bowl
Tray**



**USB
Cable**



Plug



**User
Manual**


SPECIFICATIONS

Product Name	Automatic Pet Feeder
Suitable for	Cat, Dog, Rabbit,Squirrel, Small pet
Rated Voltage	5 Volts - 1A
Product Power	5 Watts
Power Supply	DC Adapter or 4 AA Batteries (Not Included)
Material	ABS Plastic
Product Size	7.2*6.8*13.3inch/185*175*338mm
Product Weight	3.96 lbs.
Product Capacity	6 Liter
Pet Food	Dry food
Portion Size	Approx.15g/portion (May Differ Slightly for Different Sizes Food)


ASSEMBLY AND SETUP

CONNECTING POWER

- Insert the 5V power adapter into the wall socket and plug in the USB cable of the feeder.
- Open the battery compartment at the bottom of the unit and install 4 alkaline AA batteries (not included) for backup in case of a power outage.
- The LCD screen will light up automatically, indicating the feeder is on.



USB Cable



Install Batteries




Plug Into
Wall Socket



Screen Lights Up


ASSEMBLING THE FOOD TANK

- Follow the instruction as shown in.




Note: When installing the food tank,


please pay attention to the direction of the impeller.



The food inlet should be the same direction as the dispensing outlet.




Food Inlet



Dispensing
Outlet


ATTACH THE 4 RED STICKERS

The red dots are made to stick to the bottom of the unit(feet)to keep it in one place and shouldn't move around.

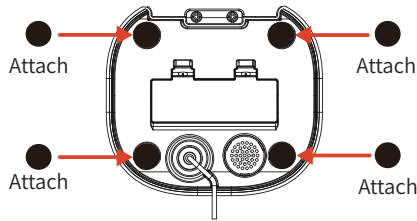

FILLING THE FOOD TANK

- Fill food tank with dry pet food.

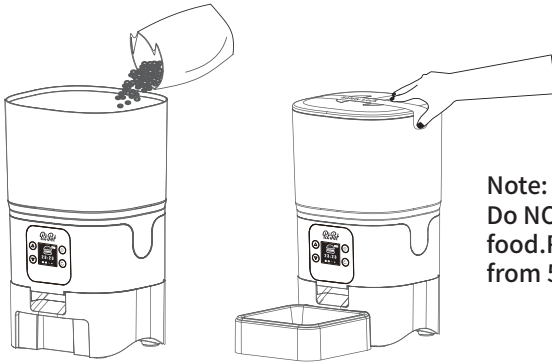


Note:

Do NOT use Canned, wet, or moist pet food. Recommend kibble size ranges from 5-10mm/ 0.2-0.4inch in diameter.


- Close the lid and lock the safety lock.





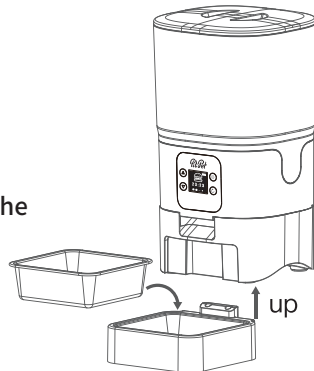


FILLING THE FOOD TANK

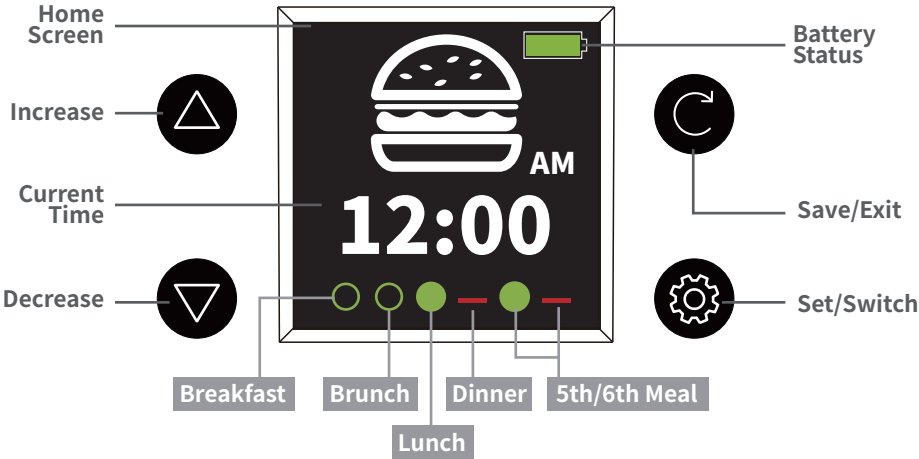- Align the bulging of the food tray and holes in the base, and push upward to connect the two.
- Put on the stainless steel feeding bowl.




BUTTON AND DISPLAY OVERVIEW



	Increase	Press to increase value. Press and hold for 3 seconds for manual feeding.
	Decrease	Press to decrease value.
	Save/Exit	Press and hold for 3 seconds to set the display time. When you are done, press again to save and exit the settings.
	Set/Switch	Press for setting and switch between time, meal and portion settings.
	Fed	Programmed meal fed already.
	To be Fed	Programmed meal waiting to be fed.
	No Meal	No meal set for this meal.

DINING INTERFACE




Meal 1-6
Portion 1-9
Meal Time

This Feeder works
with 12H time format.

MAIN INTERFACE




FACTORY DEFAULT MEAL SETTINGS

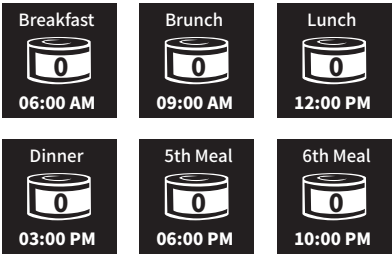


SETTING THE TIME

1. Hold and press the Save/Exit button for 3 seconds; the time 12:00 be light up.Press the increase and decrease buttons to scroll through numbers to set the hours.

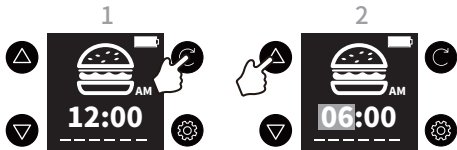


2. Press the Settings button to move to the minutes field and set the minutes similarly.After setting press the Save/Exit button to save the value; the LCD button will then display the current time.

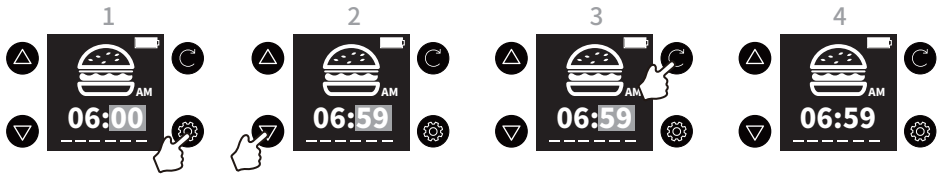


SETTING THE MEAL


1. Under the main interface, select the meals you want to set. You have 6 meals per day (Breakfast, Brunch, Lunch, Dinner, and two additional meals if your pet requires it).

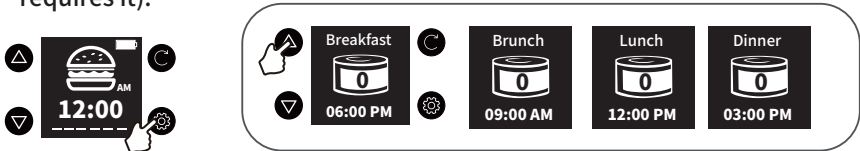

2. Taking dinner as an example, select Dinner under the meal interface and press the Settings buttons to select the portion. (The portion number will light up.)




3. Press the increase and decrease buttons to scroll through the numbers (1-9). Set the portion according to the desired volume to be dispensed for the current meal.




REFERENCE FOR PORTION SETTING:

Pet Type	Daily Intake	Meals	Portion/meal
Dog (22 lbs)	Approx. 1 cup	2	9
Cat (10 lbs)	Approx. 1/2 cup	4	2


4. After setting the portions, press the Settings button again to switch to meal time settings. The hour value will light up; press the increase and decrease buttons to scroll through the numbers and set the hour.

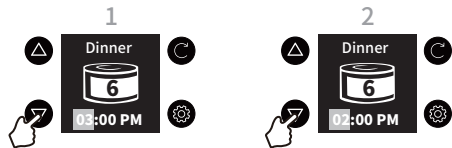

5. After setting the hours, press the Settings button again to switch to the minutes field and set the minutes similarly.

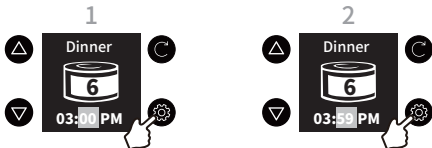

6. Once the meal time is set, press the Save/Exit button to save the setting and then press it again to return to the main interface

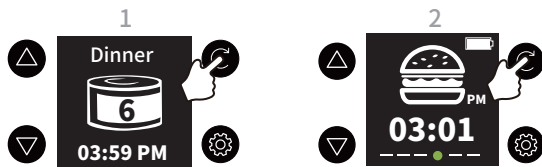

7. Your fourth meal icon will now light up in green as the fourth meal in the system was just set up.

Note: If you are feeding a large pet, one meal of 9 portions might not be enough for it. You can set another meal immediately following the first to provide it with two meals at once.

*To set just one meal per day, check all meals you have set in the past and adjust the meal portions to 0 before setting your meal

*To check your meal settings at any time, press the Settings button, and you will see the meal data for breakfast. Press the increase and decrease buttons to move to other meals.

MANUALLY FEEDING YOUR PET

Under the main interface, press and hold the increase button to manually feed your pet. One portion (approx. 15g) will be released each time.




*The normal schedule and portions will not be affected.

RECORDING A MEAL CALL

1. Connect the power cord to the power outlet.
2. Press and hold the REC button for seconds until you hear a beep.
3. Record a message of less than 10 seconds.
4. Release the REC button to save the recording.
5. Press the PLAY button to listen to your recording.
6. Long press the REC button to delete the previous recording.

Note: One recording only.

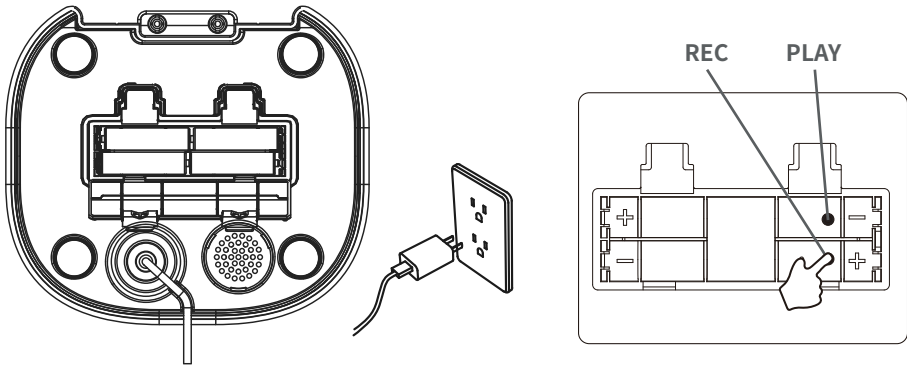



Note: The REC and PLAY buttons are located in the battery compartment. Remove the batteries before starting the recording. When feeding time comes, the recording will be played before food is dispensed to call your pet to come to eat.

CLEANING & CARE


Clean the feeder regularly is recommended for the health of your pet. Below are the washable parts of the feeder;

Dishwasher safe : Plastic food tray and stainless steel bowl only

Hand wash recommend: Tank , Lid (without desiccant bag)

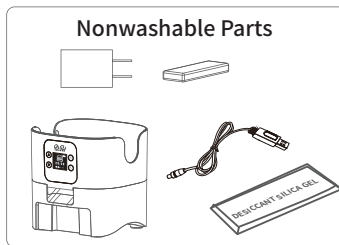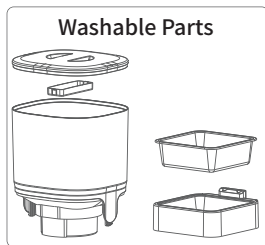

DISASSEMBLING THE FEEDER FOR CLEANING

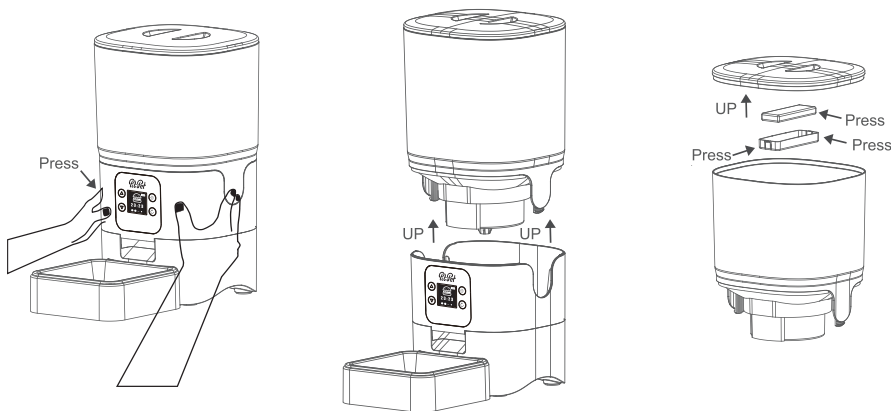

Disassembling the Food Tray

1. Empty the tray and press it down to remove it from the base.
2. Rinse and let all parts air-dry completely before reassembling.

Note: Be careful not to hurt your fingers when exerting strength to disassemble the food tank.

ENERGY-SAVING INSTRUCTIONS

In the case where there is no external power connected, the battery is low, and there is no activity, the screen will turn off after 30 seconds. If the battery is full but there is no activity, the screen will turn off after 2 minutes.

IMPORTANT NOTIFICATIONS

*We recommend installing 4 AA batteries before connecting your feeder to the DC power supply as the display time will be restored to zero after a power failure or battery replacement.

*We use a 5V safety voltage to ensure that no electricity is passed to your pet if it chews off the power cord.

*The feeder is a low-energy product. The screen will stay on to attract your pet at feeding time without depleting the power

*The first several meals the feeder will dispense, portion volumes might vary. This does not indicate a malfunction. After about 6 feedings, the portions should be mostly equal.